


114 S is a 6-strand regular lay rope, suited for use as trolley rope, mounting rope and for use with tower cranes.

MULTILAYER SPOOLING DUOFILL™ PLASTFILL®

- Ordinary lay with steel core, right or left lay
- 6 x 19S - IWRC, RCN 02

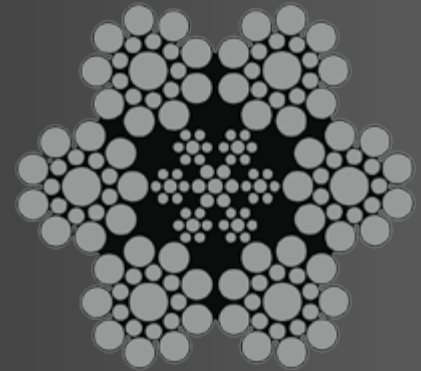

Breaking Load Table

Nominal Diameter		Weight	Minimum breaking loads - 1960 Mpa	
[mm]	[inch]		[kN]	[Kg]
6.5		0.17	30	3,059
7		0.20	34	3,467
7.5		0.23	39	3,977
8	5/16	0.26	45	4,589
9		0.32	57	5,812
10		0.41	70	7,138
11	7/16	0.47	84	8,566
12		0.59	101	10,299