


19X7 COMPACTED GALV ROTATION RESISTANT

19X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

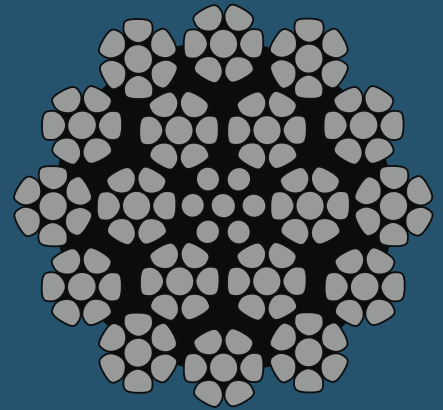

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
12	0.634	91.66	9,349	101.84	10,388
13	0.744	107.57	10,972	119.52	12,191
14	0.862	124.75	12,725	138.62	14,139
15	0.990	143.22	14,608	159.13	16,231
16	1.126	162.95	16,621	181.05	18,467
18	1.426	206.23	21,035	229.15	23,373
20	1.760	254.61	25,970	282.89	28,855
22	2.130	308.07	31,423	342.30	34,915
24	2.534	366.63	37,396	407.36	41,551
26	2.974	430.28	43,889	478.09	48,765
28	3.450	499.03	50,901	554.47	56,556
30	3.960	572.86	58,432	636.51	64,924