


19X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

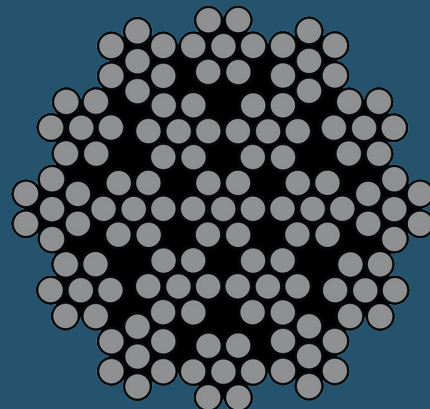

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
5	0.100	14.51	1,480	16.07	1,639
6	0.144	20.90	2,131	23.14	2,360
8	0.257	37.16	3,789	41.14	4,196
10	0.401	58.06	5,921	64.29	6,557
12	0.577	83.60	8,527	92.57	9,442
13	0.678	98.11	10,007	108.65	11,081
14	0.786	113.79	11,606	126.00	12,852
16	1.027	148.62	15,159	164.58	16,786
18	1.299	188.10	19,186	208.29	21,245
20	1.604	232.22	23,686	257.15	26,229
22	1.941	280.99	28,661	311.15	31,737
24	2.310	334.40	34,109	370.30	37,770
26	2.711	392.46	40,030	434.59	44,327