


32X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

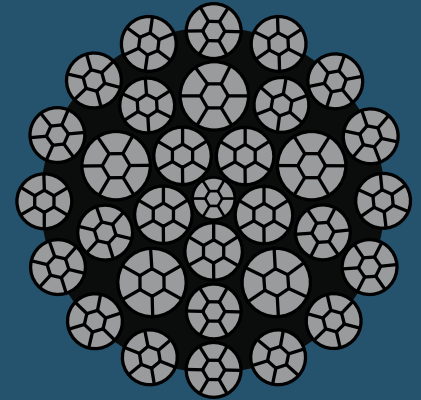

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
8	0.32	50	5,100	55	5,610
11	0.60	95	9,690	105	10,710
12	0.71	111	11,322	123	12,546
13	0.84	132	13,464	146	14,892
14	0.97	153	15,606	169	17,238
15	1.10	174	17,748	193	19,686
16	1.25	198	20,196	219	22,338
18	1.61	255	26,010	282	28,764
19	1.80	284	28,968	315	32,130
20	1.97	310	31,620	344	35,088
22	2.36	372	37,944	412	42,024