


35X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

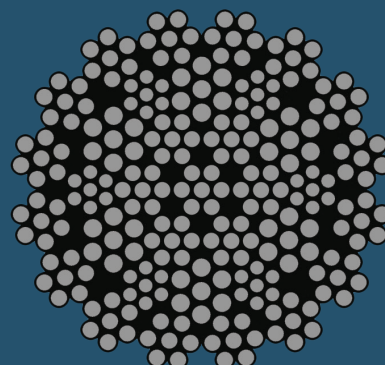

Pulley Suitable



Rotation Resist

Breaking Load Table

| Nominal Diameter [mm] | Approximate Mass [kg/m] | Minimum breaking loads - 1960 Mpa | |
|--------------------------|----------------------------|-----------------------------------|--------|
| | | [kN] | [Kg] |
| 12 | 0.654 | 101.61 | 10,363 |
| 13 | 0.767 | 119.25 | 12,163 |
| 14 | 0.890 | 138.30 | 14,106 |
| 16 | 1.162 | 180.63 | 18,424 |
| 18 | 1.471 | 228.61 | 23,318 |
| 20 | 1.816 | 282.24 | 28,788 |
| 22 | 2.197 | 341.51 | 34,834 |
| 24 | 2.615 | 406.43 | 41,455 |
| 26 | 3.069 | 476.99 | 48,652 |
| 28 | 3.559 | 553.19 | 56,425 |
| 30 | 4.086 | 635.04 | 64,774 |