


37X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

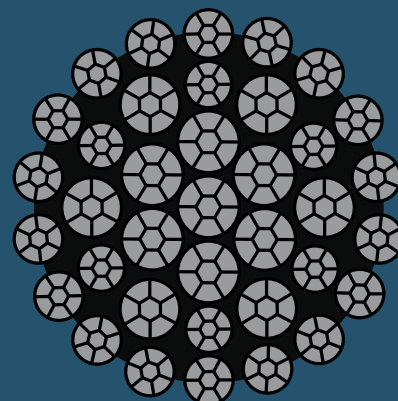

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
14	0.95	154	15,708	171	17,442
15	1.09	177	18,054	196	19,992
16	1.25	203	20,706	225	22,950
18	1.58	257	26,214	285	29,070
19	1.78	290	29,580	321	32,742
20	1.95	318	32,436	352	35,904
21	2.15	349	35,598	387	39,474
22	2.37	385	39,270	426	43,452
23	2.56	416	42,432	461	47,022
24	2.81	457	46,601	506	51,612
25	3.10	504	51,510	558	56,916
26	3.30	537	54,774	595	60,690
28	3.80	618	63,036	685	69,870
29	4.10	667	68,034	738	75,276
30	4.45	724	73,848	802	81,804
32	4.96	806	82,212	892	90,984