



In diameters up to 5mm the cable remains very flexible. Diameters 6mm and above are considered rigid. This rope is commonly used for static applications. It is available in both galvanised and marine grade stainless steel.

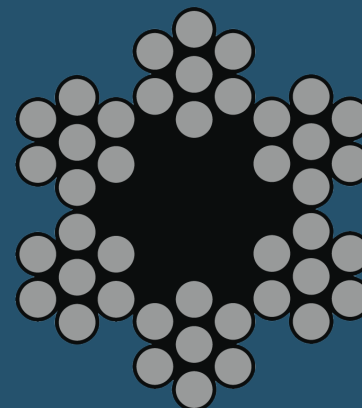

R.H.O.L



Fibre Core



Galvanised

## Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa	
		[kn]	[kg]
2	0.014	2.35	239
3	0.031	5.29	539
4	0.055	9.40	959
5	0.086	14.70	1,498
6	0.125	21.20	2,157
7	0.170	28.80	2,937
8	0.221	37.60	3,836
9	0.272	47.60	4,855
10	0.339	58.80	5,993
11	0.420	71.10	7,252
12	0.507	84.60	8,631
14	0.679	115.00	11,748
16	0.877	150.00	15,344
18	1.100	190.00	19,420
20	1.360	235.00	23,975
22	1.610	284.00	29,010
24	1.960	338.00	34,525
26	2.280	397.00	40,518
28	2.610	461.00	46,992
30	2.980	529.00	53,945
32	3.53	601.74	61,377
36	4.47	761.58	77,681
40	5.52	940.22	95,902