


6x36 is a flexible general engineering wire rope which has an equal lay construction (warrington seal) and achieves a superior breaking load than the 6x19 construction range. This construction gives flexibility with a good fatigue life.



Stainless

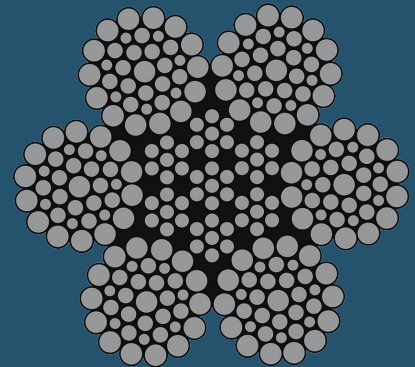

Pulley Suitable



Flexible

Breaking Load Table

| Nominal Diameter | Approximate Mass | Minimum breaking loads - 1570 Mpa | |
|------------------|------------------|-----------------------------------|--------|
| | | [kn] | [kg] |
| [mm] | [kg/m] | | |
| 8 | 0.280 | 35.80 | 3,651 |
| 9 | 0.350 | 45.30 | 4,620 |
| 10 | 0.430 | 55.90 | 5,701 |
| 11 | 0.539 | 67.60 | 6,895 |
| 12 | 0.619 | 80.50 | 8,211 |
| 14 | 0.843 | 109.50 | 11,169 |
| 16 | 1.100 | 143.10 | 14,596 |
| 18 | 1.390 | 181.00 | 18,462 |
| 20 | 1.720 | 224.00 | 22,848 |
| 22 | 2.160 | 271.00 | 27,642 |
| 24 | 2.480 | 322.00 | 32,844 |
| 26 | 2.760 | 378.00 | 38,515 |
| 28 | 3.370 | 438.00 | 44,676 |
| 30 | 3.870 | 503.00 | 51,306 |
| 32 | 4.410 | 572.00 | 58,344 |