

6x37 is a cross laid construction used for general engineering applications. In the European mainland, vast quantities of 6x37 are used for a variety of applications.




Galvanised




Pulley Suitable



Flexible



Fibre Core

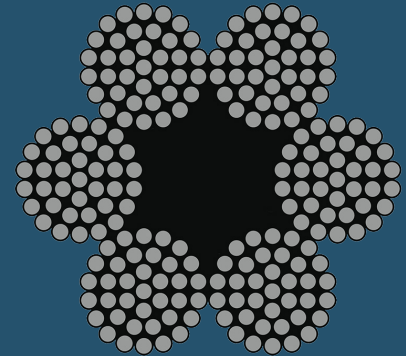

## Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kn]	[kg]	[kn]	[kg]
12	0.498	75.2	7,669	83.3	8,492
13	0.585	88.2	9,000	97.7	9,967
14	0.678	102.3	10,438	113.3	11,559
16	0.886	133.7	13,634	148.0	15,098
18	1.121	169.2	17,256	187.3	19,108
20	1.384	208.9	21,303	231.3	23,590
22	1.675	252.7	25,777	279.8	28,544
24	1.993	300.8	30,677	333.0	33,970
26	2.339	353.0	36,003	390.9	39,868
28	2.713	409.4	41,755	453.3	46,237
30	3.114	469.9	47,933	520.4	53,078
32	3.543	534.7	54,537	592.1	60,391
34	4.000	603.6	61,567	668.4	68,176
36	4.484	676.7	69,024	749.3	76,433
38	4.996	754.0	76,906	834.9	85,161
40	5.536	835.4	85,214	925.1	94,362
42	6.103	921.1	93,949	1019.9	104,034
44	6.699	1010.9	103,110	1119.4	114,178
46	7.321	1104.9	112,696	1223.5	124,794
48	7.972	1203.0	122,709	1332.2	135,881