




6X7 COMPACTED FIBRE CORE GALVANISED

In diameters up to 5mm the cable remains very flexible. Diameters 6mm and above are considered rigid. This rope is commonly used for static applications. It is available in both galvanised and marine grade stainless steel.

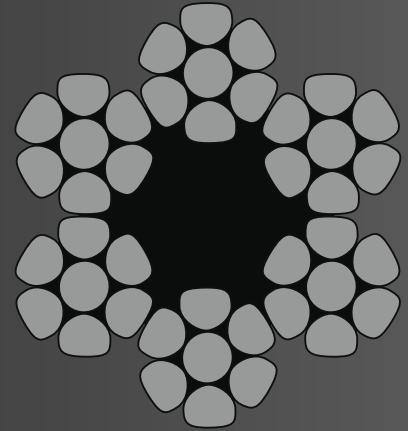

R.H.O.L



Fibre Core



Galvanised

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa	
		[kN]	[kg]
8	0.264	41.25	4.208
9	0.341	52.21	5.326
10	0.407	64.47	6.576
11	0.495	78.00	7.956
12	0.572	92.83	9.469
13	0.682	108.95	11.113
14	0.787	126.35	12.888
15	0.913	145.04	14.795
16	1.023	165.02	16.833
18	1.296	208.87	21.305
20	1.584	257.86	26.302