


PS 610 F is an extremely robust design including a plastic-infused fiber core makes this compacted steel wire rope ideal for use as a dragline in gravel mining, scraper installations, and on logging winches.

MULTILAYER SPOOLING
  DUOFILL™
  PLASTFILL®

- Lang's lay, right or left lay
- 6 x K21F - SFC, RCN 03

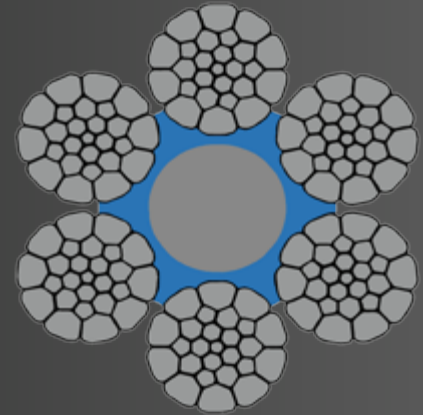

### Breaking Load Table

Nominal Diameter [mm]	Weight [kg/m]	Minimum breaking loads - 1770 Mpa	
		[kN]	[Kg]
22	2.1	375	38,239
26	2.75	517	52,719
29	3.7	643	65,568
36	5.25	955	97,383
40	6.47	1,232	125,629