


Flexibility, resistance to mechanical wear and high breaking force: these are the qualities a drill line must possess. This 6-strand compacted rope with SUPERFILL® and a PLASTFILL® insert is perfect for drilling operations.

MULTILAYER SPOOLING
 SUPERFILL®
 PLASTFILL®

- 30–50 mm: 6 x K26WS-EPIWRC, RCN 06 / 50–56 mm: 6 x K31WS-EPIWRC, RCN 08
- Ordinary lay, right or left lay

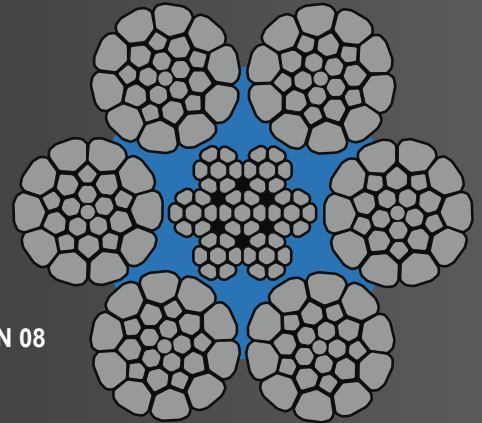

Breaking Load Table

Nominal Diameter		Weight	Minimum Breaking Loads			
			1960 Mpa		2160 Mpa	
[mm]	[inch]	[kg/m]	[kN]	[Kg]	[kN]	[Kg]
34.9	1 3/8	5.40	1,024	104,392	1,106	112,811
38.1	1 1/2	6.40	1,220	124,413	1,318	134,447
41.27	1 5/8	7.54	1,432	146,023	1,547	157,750
44.45	1 3/4	8.95	1,661	169,340	1,795	182,997
47.6	1 7/8	9.98	1,904	194,192	2,058	209,853
50.8	2	11.50	2,197	224,015	2,344	239,017
54.0	2 1/8	13.00	2,451	249,922	2,649	270,078
56.0	-	13.87	2,636	268,778	2,848	290,454