


Execution K3 is a 6-strand regular lay rope, suited as a crowd rope for rotary drilling rigs. It is resistant to shock loads and is a cost effective 6 strand rope that serves as an alternative to the 8 strand ropes.

MULTILAYER SPOOLING
  DUOFILL™
  PLASTFILL®

- 6 x K31WS – IWRC(K), RCN 08
- Ordinary lay, right or left lay

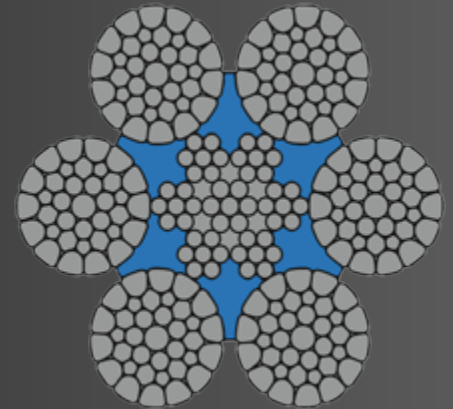

## Breaking Load Table

Nominal Diameter [mm]	Weight [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
20	1.8	315	32,121	349	35,588
22	2.2	381	38,851	410	41,808
24	2.7	453	46,193	502	51,190
26	3.0	532	54,249	589	60,061
28	3.5	617	62,916	690	70,360
30	4.0	708	72,196	784	79,946