


Highest resistance to crushing and deformation!
EVOLUTION P9 - the high performance boom hoist rope impresses with highest dimensional stability and breaking forces with a maximum in flexibility.



Galvanised

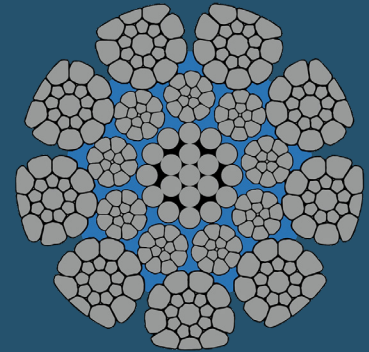

Flexible



Pulley Suitable



High Strength



Breaking Load Table

Nominal Diameter		Weight [kg/m]	Minimum breaking loads - 1960 Mpa		Minimum breaking loads - 2160 Mpa	
[mm]	[inch]		[kN]	[Kg]	[kN]	[Kg]
22		2.74	507	51,700	536	54,657
22.22	7/8	2.80	517	52,719	547	55,778
24		3.27	603	61,489	638	65,058
25		3.54	654	66,689	693	70,666
25.40	1	3.66	675	68,831	715	72,910
26		3.83	708	72,196	749	76,377
28		4.45	821	83,719	869	88,613
28.57	1 1/8	4.63	854	87,084	905	92,284
30		5.10	942	96,057	998	101,768
31.75	1 1/4	5.72	1,055	107,580	1,117	113,902
32		5.81	1,072	109,314	1,135	115,738
34		6.56	1,210	123,386	1,281	130,626
34.92	1 3/8	6.92	1,276	130,116	1,352	137,866
36		7.35	1,357	138,375	1,436	146,431
38		8.19	1,512	154,181	1,600	163,155
38.1	1 1/2	8.23	1,520	154,997	1,609	164,072