

Endurance is everything. EVOLUTION Q8 is a high-performance hoisting rope for harbour mobile cranes - impresses with its exceptional long service life and high breaking strength EVOLUTION Q8 lasts much longer!



Galvanised




Pulley Suitable



High Strength



Flexible

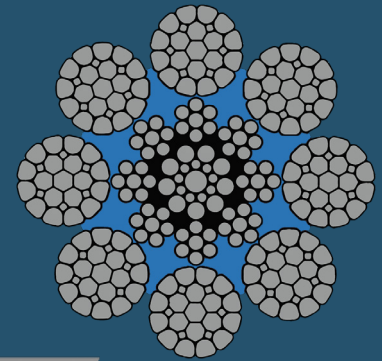

Breaking Load Table

Nominal Diameter		Weight	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
[mm]	[inch]		[kN]	[Kg]	[kN]	[Kg]
12	9/16	0.64	110	11,217	122	12,441
14	5/8	0.85	150	15,296	166	16,927
16		1.13	196	19,986	217	22,128
18		1.40	247	25,187	274	27,940
20	7/8	1.78	306	31,203	339	34,568
22		2.11	370	37,729	410	41,808
24	1	2.49	441	44,969	502	51,190
25		2.74	478	48,742	529	53,943
26		2.94	517	52,719	572	58,328
28		3.51	600	61,183	664	67,709
29		3.72	643	65,568	712	72,604
30	1 1/4	3.94	688	70,156	762	77,702
32		4.65	783	79,844	867	88,409
34		5.24	882	89,939	977	99,626
36	1 1/2	6.02	999	101,870	1,097	111,863
38		6.69	1,104	112,577	1,223	124,711
40		7.41	1,223	124,711	1,355	138,172
42		8.17	1,349	137,560	1,494	152,346
44		9.00	1,480	150,918	1,639	167,131
46		9.80	1,618	164,990	1,792	182,733
48		10.55	1,762	179,674	1,951	198,947
50		11.44	1,912	194,970	2,117	215,874
54		13.41	2,230	227,397	2,469	251,768